

LIGHTINGRETROFIT

Induction high bay light LRF-GC016A

Technical Data

Circuit Power - 150W , 200W , 250W

Voltage - 230vac Current - 0.6A , 0.9A , 1.1A

Power Factor - > 0.95

Operating Frequency - 230KHz (no flicker)

Operating Temperature range - -20degC to +50degC

Maximum Operating Temperature - +85degC

Ingress Protection - Ballast housing IP65 , Lamp housing IP54

Certification - SAA approval no. ND140059 , IEC55015 & AS/NZS60598 compliance reports.

Colour Temperature - 3000-6500 Kelvin (5000K is stock item, other colours to order)

Colour Render Index - >85Ra

Total Lumens * - 12,300 , 16,400 , 20,500 Lumens per Watt * - 82

P/S ratio - 1.96 Total Pupil Lumens * - 24,100 , 32,150 , 40,180

Lumen Maintenance - @ 2,000hrs => 95% , @16,000hrs=> 90% , @60,000hrs => 80%

Dimensions - Aluminium reflector & ballast housing 55cm diameter by 40cm high


Reflector Cover - Polycarbonate

Switching - Instant switching

Life span / Warranty - 80,000 hours average / 2 year lamp and ballast parts warranty

* Subject to 3% variation up or down per fitting

2015 Pricing	
Item	Price
GC016A -150W	\$279.00 +GST *
GC016A -200W	\$289.00 +GST *
GC016A -250W	\$299.00 +GST *

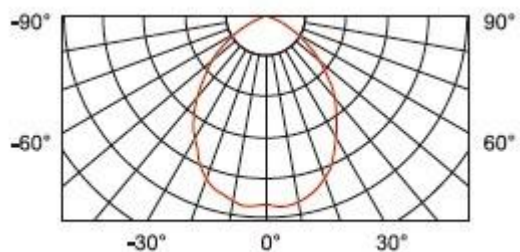

Baytrade Nominees Pty Ltd
ABN 77 082 123 117
lightingretrofit.aus@gmail.com

