

# LIGHTINGRETROFIT

## Induction flood light LRF-TG001A and B

### Technical Data

Power - 150W to 250W

Voltage - 230vac Current - 0.6A , 1.1A

Power Factor - > 0.95

Operating Frequency - 230KHz (no flicker)

Operating Temperature range - -25degC to +50degC

Maximum Operating Temperature - +85degC

Ingress Protection - IP65

Certification - CE, CCC , RoHS , FCC approvals and IEC55015, IEC60598 compliance reports.

Colour Temperature - 3000-6500 Kelvin (5000K is stock item, other colours to order)

Colour Render Index - >85Ra

Total Lumens \* - 12,300 , 20,500 Lumens per Watt \* - 82

P/S ratio - 1.96 Total Pupil Lumens \* - 24,100 , 40,180

Lumen Maintenance - @ 2,000hrs => 95% , @16,000hrs=> 90% , @60,000hrs => 80%

Dimensions - Aluminium die cast housing A - 43cm wide by 43cm high by 14cm deep , 6.2kG weight or B - 57cm wide by 56cm high by 30cm deep, 13kG weight


Reflector Cover - Toughened glass

Switching - Instant switching

Life span / Warranty - 80,000 hours average / 2 year lamp and ballast parts warranty

\* Subject to 3% variation up or down per fitting

2015 Pricing	
Item	Price
TG001A -150W	\$259.00 +GST *
TG001B -250W	\$319.00 +GST *

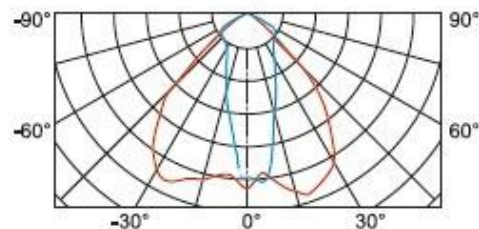

Baytrade Nominees Pty Ltd  
ABN 77 082 123 117  
[lightingretrofit.aus@gmail.com](mailto:lightingretrofit.aus@gmail.com)

